


SOLEMLUX
SINCE 2008




COLOR
PLEATED BLINDS

2020

www.solemlux.it/en/




PLI 0001



PLI 0101



PLI 0002



PLI 0102



PLI 0003



PLI 0103



PLI 0004



PLI 0104



PLI 0005




PLI 0105



PLI 0006




PLI 0106





PLI.0001
PLI.0002
PLI.0003
PLI.0004
PLI.0005
PLI.0006
PLI.0101
PLI.0102
PLI.0103
PLI.0104
PLI.0105
PLI.0106

Sudētis												
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав												
Plotis, cm												
Width, cm	210	210	210	210	210	210	190	190	190	190	190	190
Ширина, см												
Storis (+/- 5%), mm												
Thickness (+/- 5%), mm	0.27	0.27	0.27	0.27	0.27	0.27	0.29	0.29	0.29	0.29	0.29	0.29
Толщина (+/- 5%), мм												
Svoris (+/- 5%), g/m ²												
Weight (+/- 5%), g/m ²	91	91	91	91	91	91	111	111	111	111	111	111
Вес (+/- 5%), г/м ²												
Šviesos atspindumas												
Light fastness	>6	>6	>6	>6	>6	>6	>5	>5	>5	>5	>5	>5
Светостойкость												
Drėgnas valymas												
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка												
Šviesos atspindėjimas, %												
Light reflection, %	—	—	—	—	—	—	—	—	—	—	—	—
Отражение света, %												
Šviesos sugėrimas, %												
Light absorption, %	—	—	—	—	—	—	—	—	—	—	—	—
Затемнение света, %												
Šviesos perdavimas, %												
Light transmission, %	—	—	—	—	—	—	—	—	—	—	—	—
Светопропускание, %												
Degumas												
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость												

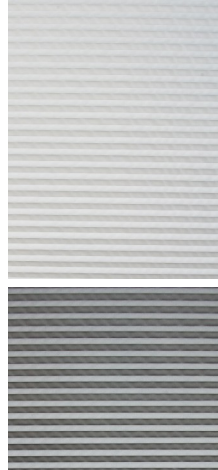


SOLEMLUX






PLI 1001



PLI 1002



PLI 1008



PLI 1003



PLI 1009



PLI 1004



PLI 1010



PLI 1005




PLI 1011



PLI 1006



PLI 1012



PLI 1007




PLI 1013





	PLI 1001	PLI 1002	PLI 1003	PLI 1004	PLI 1005	PLI 1006	PLI 1007	PLI 1008	PLI 1009	PLI 1010	PLI 1011	PLI 1012	PLI 1013
Sudētis													
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав													
Plotis, cm													
Width, cm	225	225	225	225	225	225	225	225	225	225	225	225	225
Шерина, см													
Storis (+/- 5%), mm													
Thickness (+/- 5%), mm	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
Толщина (+/- 5%), мм													
Svoris (+/- 5%), g/m ²													
Weight (+/- 5%), g/m ²	86	86	86	86	86	86	86	86	86	86	86	86	86
Вес (+/- 5%), г/м ²													
Šviesos atsparumas													
Light fastness	5-7	5-7	5-7	5-7	5-7	5-7	5-7	5-7	5-7	5-7	5-7	5-7	5-7
Светостойкость													
Drėgnas valymas													
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка													
Šviesos atspindėjimas, %													
Light reflection, %	45%	46%	45%	44%	40%	15%	7%	33%	22%	18%	3%	46%	10%
Отражение света, %													
Šviesos sugėrimas, %													
Light absorption, %	3%	1%	4%	10%	13%	68%	85%	28%	55%	59%	94%	6%	82%
Затемнение света, %													
Šviesos perdavimas, %													
Light transmission, %	52%	53%	51%	46%	47%	17%	8%	39%	23%	23%	3%	48%	8%
Светопропускание, %													
Degumas													
Flame retardant	•	•	•	•	•	•	•	•	•	•	•	•	•
Огнестойкость													

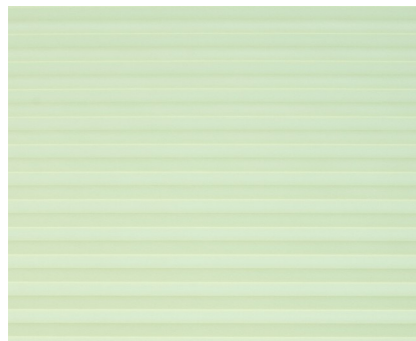


SOLEMLUX






PLI 1101



PLI 1102



PLI 1108



PLI 1103



PLI 1109



PLI 1104



PLI 1110



PLI 1105



PLI 1111




PLI 1106



PLI 1112



PLI 1107



PLI 1113






PLI 1101
PLI 1102
PLI 1103
PLI 1104
PLI 1105
PLI 1106
PLI 1107
PLI 1108
PLI 1109
PLI 1110
PLI 1111
PLI 1112
PLI 1113

Sudētis													
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав													
Plotis, cm													
Width, cm	225	225	225	225	225	225	225	225	225	225	225	225	225
Шерина, см													
Storis (+/- 5%), mm													
Thickness (+/- 5%), mm	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
Толщина (+/- 5%), мм													
Svoris (+/- 5%), g/m ²													
Weight (+/- 5%), g/m ²	95	95	95	95	95	95	95	95	95	95	95	95	95
Вес (+/- 5%), г/м ²													
Šviesos atsparumas													
Light fastness	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7	6-7
Светостойкость													
Drėgnas valymas													
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка													
Šviesos atspindėjimas, %													
Light reflection, %	67%	51%	42%	51%	33%	58%	37%	29%	30%	53%	39%	41%	29%
Отражение света, %													
Šviesos sugėrimas, %													
Light absorption, %	2%	22%	37%	28%	54%	20%	49%	59%	57%	23%	42%	37%	60%
Затемнение света, %													
Šviesos perdavimas, %													
Light transmission, %	31%	27%	21%	21%	13%	22%	14%	12%	13%	24%	19%	22%	11%
Светопропускание, %													
Degumas													
Flame retardant	•	•	•	•	•	•	•	•	•	•	•	•	•
Огнестойкость													




SOLEMLUX

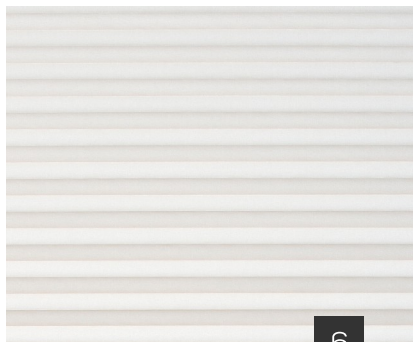




PLI 2101



PLI 2102



PLI 2108



PLI 2103



PLI 2109



PLI 2104



PLI 2110



PLI 2105



PLI 2111




PLI 2106



PLI 2112



PLI 2107




PLI 2113





	PLI 2101	PLI 2102	PLI 2103	PLI 2104	PLI 2105	PLI 2106	PLI 2107	PLI 2108	PLI 2109	PLI 2110	PLI 2111	PLI 2112	PLI 2113
Sudētis													
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав													
Plotis, cm													
Width, cm	225	225	225	225	225	225	225	225	225	225	225	225	225
Ширина, см													
Storis (+/- 5%), mm													
Thickness (+/- 5%), mm	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35	0.35
Толщина (+/- 5%), мм													
Svoris (+/- 5%), g/m ²													
Weight (+/- 5%), g/m ²	150	150	150	150	150	150	150	150	150	150	150	150	150
Вес (+/- 5%), г/м ²													
Šviesos atspārums													
Light fastness	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6	5-6
Светостойкость													
Drēgnas valymas													
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка													
Šviesos atspindējums, %													
Light reflection, %	69%	67%	61%	42%	44%	27%	59%	18%	13%	47%	45%	27%	24%
Отражение света, %													
Šviesos sugērimas, %													
Light absorption, %	12%	19%	23%	40%	39%	60%	27%	69%	76%	34%	39%	59%	61%
Затемнение света, %													
Šviesos perdavimas, %													
Light transmission, %	19%	14%	16%	18%	17%	13%	14%	13%	11%	19%	16%	14%	15%
Светопропускание, %													
Degumas													
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость													

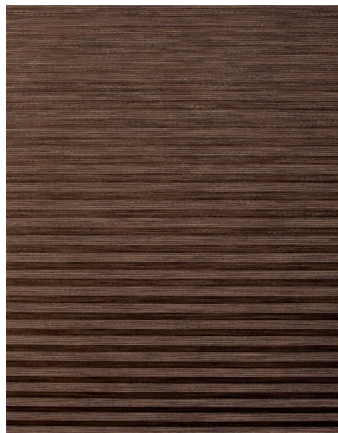



PLI 1201



PLI 1301



PLI 1202



PLI 1302



PLI 1203



PLI 1303



PLI 1204



PLI 1304



PLI 1205




PLI 1305



PLI 1206



PLI 1306



PLI 1207



PLI 1307





	PLI 1201	PLI 1202	PLI 1203	PLI 1204	PLI 1205	PLI 1206	PLI 1207	PLI 1301	PLI 1302	PLI 1303	PLI 1304	PLI 1305	PLI 1306	PLI 1307
Sudēts														
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав														
Plotis, cm														
Width, cm	240	240	240	240	240	240	240	240	240	240	240	240	240	240
Ширина, см														
Storis (+/- 5%), mm														
Thickness (+/- 5%), mm	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
Толщина (+/- 5%), мм														
Svoris (+/- 5%), g/m ²														
Weight (+/- 5%), g/m ²	140	140	140	140	140	140	140	150	150	150	150	150	150	150
Бес (+/- 5%), r/m ²														
Šviesos atsparums														
Light fastness	5-6	5-6	5-6	5-6	5-6	5-6	5-6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Светостойкость														
Drēgšanas valymas														
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка														
Šviesos atspindējamība, %														
Light reflection, %	58%	55%	48%	14%	48%	28%	11%	71%	62%	64%	52%	57%	61%	34%
Отражение света, %														
Šviesos sugērijamība, %														
Light absorption, %	0%	1%	16%	78%	16%	53%	85%	1%	21%	14%	39%	26%	23%	66%
Затемнение света, %														
Šviesos pērdamība, %														
Light transmission, %	42%	44%	36%	8%	36%	19%	4%	28%	17%	22%	9%	17%	16%	0%
Светопроникание, %														
Degumams														
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость														




SOLEMLUX






PLI 4001




PLI 4002



PLI 4003



PLI 4004



PLI 4005



PLI 4006




PLI 4007




PLI 4101



PLI 4102



PLI 4103




PLI 3401



PLI 3402



PLI 3403



PLI 3404






	PLI.4001	PLI.4002	PLI.4003	PLI.4004	PLI.4005	PLI.4006	PLI.4007	PLI.4101	PLI.4102	PLI.4103	PLI.3401	PLI.3402	PLI.3403	PLI.3404
Sudėtis														
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав														
Plotis, cm														
Width, cm	235	235	235	235	235	235	235	235	235	235	215	215	215	215
Ширина, см														
Storis (+/- 5%), mm														
Thickness (+/- 5%), mm	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.22	0.22	0.22	0.22
Толщина (+/- 5%), мм														
Svoris (+/- 5%), g/m ²														
Weight (+/- 5%), g/m ²	260	260	260	260	260	260	260	260	260	260	150	150	150	150
Вес (+/- 5%), r/m ²														
Šviesos atsparumas														
Light fastness	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6-7	≥ 6	≥ 6	≥ 6	≥ 6
Светостойкость														
Drėgnas valymas														
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка														
Šviesos atspindėjimas, %														
Light reflection, %	85%	85%	85%	85%	85%	85%	85%	85%	85%	85%	82%	82%	82%	82%
Отражение света, %														
Šviesos sugėrimas, %														
Light absorption, %	15%	15%	15%	15%	15%	15%	15%	15%	15%	15%	18%	18%	18%	18%
Затемнение света, %														
Šviesos perdavimas, %														
Light transmission, %	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Светопропускание, %														
Degumas														
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость														





PLI 1401



PLI 2001



PLI 1402



PLI 2002




PLI 1403



PLI 2003




PLI 1404



PLI 2004




PLI 1405




PLI 2005



PLI 1406




PLI 2006



PLI 1407




PLI 2007





	PLI 1401	PLI 1402	PLI 1403	PLI 1404	PLI 1405	PLI 1406	PLI 1407	PLI 2001	PLI 2002	PLI 2003	PLI 2004	PLI 2005	PLI 2006	PLI 2007
Sudētijs														
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав														
Plotis, cm														
Width, cm	230	230	230	230	230	230	230	220	220	220	220	220	220	220
Ширина, см														
Storis (+/- 5%), mm														
Thickness (+/- 5%), mm	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.50	0.50	0.50	0.50	0.50	0.50	0.50
Толщина (+/- 5%), мм														
Svoris (+/- 5%), g/m ²														
Weight (+/- 5%), g/m ²	100	100	100	100	100	100	100	100	100	100	100	100	100	100
Вес (+/- 5%), г/м ²														
Šviesos atsparumas														
Light fastness	> 5	> 5	> 5	> 5	> 5	> 5	> 5	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6
Светостойкость														
Drēgšanas valymas														
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка														
Šviesos atspindzīgums, %														
Light reflection, %	50%	47%	15%	37%	40%	29%	38%	62%	64%	61%	44%	57%	41%	34%
Отражение света, %														
Šviesos sugērimas, %														
Light absorption, %	1%	5%	69%	27%	20%	40%	24%	0%	0%	10%	48%	18%	50%	66%
Затемнение света, %														
Šviesos perdavimas, %														
Light transmission, %	49%	48%	16%	36%	40%	31%	38%	36%	36%	29%	8%	25%	9%	0%
Светопропускание, %														
Degumas														
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость														

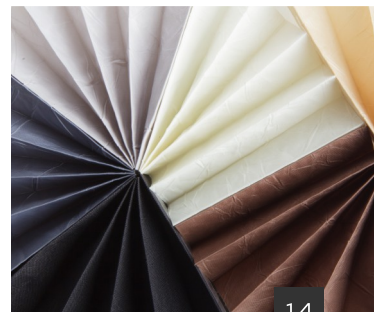



PLI 1501



PLI 3301



PLI 1502



PLI 3302



PLI 1503



PLI 3303



PLI 1504



PLI 3304



PLI 1601



PLI 2201



PLI 1602



PLI 2202



PLI 1603




PLI 2203





	PLI 1501	PLI 1502	PLI 1503	PLI 1504	PLI 1601	PLI 1602	PLI 1603	PLI 3301	PLI 3302	PLI 3303	PLI 3304	PLI 2201	PLI 2202	PLI 2203
Sudētiš														
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав														
Plotis, cm														
Width, cm	200	200	200	200	225	225	225	215	215	215	215	240	240	240
Ширина, см														
Storis (+/- 5%), mm														
Thickness (+/- 5%), mm	0.30	0.30	0.30	0.30	0.15	0.15	0.15	0.17	0.17	0.17	0.17	0.20	0.20	0.20
Толщина (+/- 5%), мм														
Svoris (+/- 5%), g/m ²														
Weight (+/- 5%), g/m ²	140	140	140	140	95	95	95	90	90	90	90	125	125	125
Вес (+/- 5%), г/м ²														
Šviesos atsparumas														
Light fastness	5-6	6-7	6-7	6-7	6-7	6-7	6-7	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 6-7	≥ 6-7	≥ 6-7
Светостойкость														
Drēgņas valymas														
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка														
Šviesos atspindējamība, %														
Light reflection, %	51%	48%	46%	35%	37%	34%	38%	69%	66%	56%	23%	57%	61%	35%
Отражение света, %														
Šviesos sugērimība, %														
Light absorption, %	3%	6%	14%	40%	26%	43%	34%	0%	4%	25%	71%	23%	11%	59%
Затемнение света, %														
Šviesos perdavības, %														
Light transmission, %	46%	45%	40%	25%	37%	23%	28%	31%	30%	19%	6%	20%	28%	6%
Светопропускание, %														
Degums														
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость														

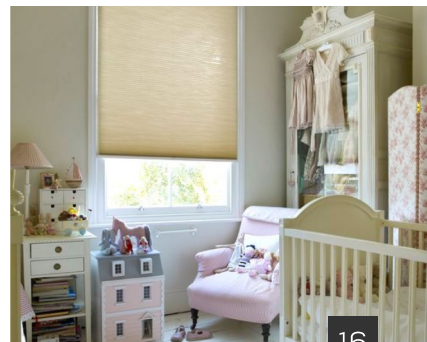

SOLEMLUX



PLI 4301



PLI 4201



PLI 3601



PLI 3201



PLI 4401



PLI 3202



PLI 4402



PLI 4501



PLI 2301



PLI 4502



PLI 2302



PLI 4601



PLI 2303




PLI 4602






	PLI 4301	PLI 3801	PLI 4401	PLI 4402	PLI 2301	PLI 2302	PLI 2303	PLI 4201	PLI 3201	PLI 3202	PLI 4601	PLI 4602	PLI 4801	PLI 4802
Sudētišs														
Basic material	65% PES + 35% LAMINĀTĀS 9% VISKOZE	70% PES + 30% VISKOZE	65% PES + 35% VISKOZE	70% PES + 30% VISKOZE	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав														
Plotis, cm														
Width, cm	235	235	235	235	240	240	240	235	235	230	270	270	215	215
Ширина, см														
Storis (+/- 5%), mm														
Thickness (+/- 5%), mm	0.34	0.27	0.24-0.28	0.24-0.28	0.17	0.17	0.17	0.38	0.55	0.60	0.49	0.49	0.50	0.50
Толщина (+/- 5%), мм														
Svoris (+/- 5%), g/m ²														
Weight (+/- 5%), g/m ²	114	101	85-105	85-105	85	85	85	94	110	110	47	47	125	125
Вес (+/- 5%), г/м ²														
Šviesas atspārums														
Light fastness	5-7	5-7	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	5-7	26	26	7	7	5-7	5-7
Светостойкость														
Drēgnas valymas														
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка														
Šviesas atspindējamība, %														
Light reflection, %	46%	41%	—	—	42%	42%	30%	51%	29%	32%	16.8%	14.5%	3.4%	11.2%
Отражение света, %														
Šviesas sugērimība, %														
Light absorption, %	10%	1%	—	—	0%	0%	24%	8%	0%	0%	0.2%	4.1%	96.3%	82.2%
Затемнение света, %														
Šviesas pērdamība, %														
Light transmission, %	44%	58%	—	—	58%	58%	46%	41%	71%	68%	83.0%	81.4%	0.3%	6.6%
Светопропускание, %														
Degūmas														
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость														



SOLEMLUX

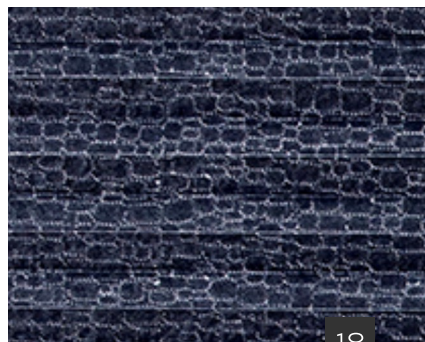



PLI 3501




PLI 3502



PLI 3101



PLI 2501



PLI 3102



PLI 2502



PLI 3103



PLI 2503



PLI 3001



PLI 2601




PLI 3002



PLI 2602



PLI 3003



PLI 2603





PLI 2401




PLI 2407



PLI 2402



PLI 2408




PLI 2403




PLI 2409




PLI 2404



PLI 2410



PLI 2405



PLI 2411



PLI 2406



PLI 2412






	PLI 3001	PLI 3002	PLI 3101	PLI 3102	PLI 3103	PLI 3001	PLI 3002	PLI 3003	PLI 2501	PLI 2502	PLI 2503	PLI 2601	PLI 2602	PLI 2603	
Sudētis															
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав															
Plotis, cm															
Width, cm	215	215	230	230	230	230	230	230	235	235	235	235	235	235	235
Ширина, см															
Storis (+/- 5%), mm															
Thickness (+/- 5%), mm	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.28	0.28	0.28	0.32	0.32	0.32	0.32
Толщина (+/- 5%), мм															
Svoris (+/- 5%), g/m ²															
Weight (+/- 5%), g/m ²	100	100	115	115	115	115	115	115	85	85	85	163	163	163	163
Вес (+/- 5%), г/м ²															
Šviesos atspindinamumas															
Light fastness	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	5-7	5-7	5-7	5-7	5-7	5-7	5-7
Светостойкость															
Drėgnas valymas															
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка															
Šviesos atspindėjimas, %															
Light reflection, %	69%	66%	67%	67%	67%	-	-	-	52%	41%	20%	38%	30%	29%	29%
Отражение света, %															
Šviesos sugėrimas, %															
Light absorption, %	0%	4%	2%	2%	2%	-	-	-	3%	23%	69%	41%	55%	57%	57%
Затемнение света, %															
Šviesos perdavimas, %															
Light transmission, %	31%	30%	31%	31%	31%	-	-	-	45%	36%	11%	21%	15%	14%	14%
Светопропускание, %															
Degumas															
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость															



SOLEMLUX

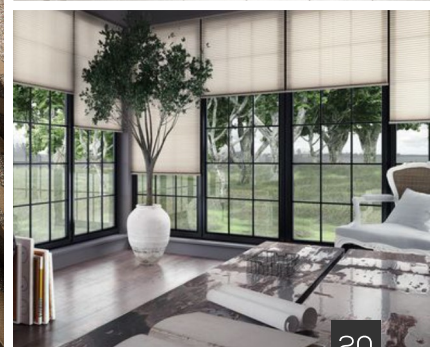





	PLI 2401	PLI 2402	PLI 2403	PLI 2404	PLI 2405	PLI 2406	PLI 2407	PLI 2408	PLI 2409	PLI 2410	PLI 2411	PLI 2412
Sudētis												
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав												
Plotis, cm												
Width, cm	240	240	240	240	240	240	240	240	240	240	240	240
Ширина, см												
Storis (+/- 5%), mm												
Thickness (+/- 5%), mm	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
Толщина (+/- 5%), мм												
Svoris (+/- 5%), g/m ²												
Weight (+/- 5%), g/m ²	110	110	110	110	110	110	110	110	110	110	110	110
Вес (+/- 5%), г/м ²												
Šviesos atspindėjimas												
Light fastness	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6	≥ 5-6
Светостойкость												
Drėgnas valymas												
Wet cleaning	•	•	•	•	•	•	•	•	•	•	•	•
Влажная чистка												
Šviesos atspindėjimas, %												
Light reflection, %	69%	69%	61%	67%	58%	38%	41%	62%	65%	62%	64%	58%
Отражение света, %												
Šviesos sugėrimas, %												
Light absorption, %	1%	10%	19%	17%	37%	61%	59%	13%	6%	8%	28%	41%
Затемнение света, %												
Šviesos perdavimas, %												
Light transmission, %	30%	21%	20%	16%	5%	1%	0%	25%	29%	30%	8%	1%
Светопропускание, %												
Degumas												
Flame retardant	—	—	—	—	—	—	—	—	—	—	—	—
Огнестойкость												




SOLEMLUX



PLI 5001



PLI 5006




PLI 5002




PLI 5007



PLI 5003



PLI 5008




PLI 5004



PLI 5009



PLI 5005



PLI 5010





	PLI 5001	PLI 5002	PLI 5003	PLI 5004	PLI 5005	PLI 5006	PLI 5007	PLI 5008	PLI 5009	PLI 5010
Sudētis										
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав										
Plotis, cm										
Width, cm	300	300	300	300	300	300	300	300	300	300
Ширина, см										
Storis (+/- 5%), mm										
Thickness (+/- 5%), mm	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Толщина (+/- 5%), мм										
Svoris (+/- 5%), g/m ²										
Weight (+/- 5%), g/m ²	144	144	144	144	144	144	144	144	144	144
Вес (+/- 5%), г/м ²										
Šviesos atsparumas										
Light fastness	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5
Светостойкость										
Drėgnas valymas										
Wet cleaning	•	•	•	•	•	•	•	•	•	•
Влажная чистка										
Šviesos atspindėjimas, %										
Light reflection, %	54%	61%	55%	55%	53%	55%	48%	53%	51%	31%
Отражение света, %										
Šviesos sugėrimas, %										
Light absorption, %	12%	5%	14%	14%	24%	14%	35%	24%	33%	59%
Затемнение света, %										
Šviesos perdavimas, %										
Light transmission, %	34%	34%	31%	31%	23%	31%	17%	23%	16%	10%
Светопропускание, %										
Degumas										
Flame retardant	—	—	—	—	—	—	—	—	—	—
Огнестойкость										




SOLEMLUX





PLI 6001



PLI 6006




PLI 6002



PLI 6007



PLI 6003



PLI 6008



PLI 6004



PLI 6009



PLI 6005



PLI 6010






	PLI 6001	PLI 6002	PLI 6003	PLI 6004	PLI 6005	PLI 6006	PLI 6007	PLI 6008	PLI 6009	PLI 6010
Sudėtis										
Basic material	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES	100% PES
Состав										
Plotis, cm										
Width, cm	300	300	300	300	300	300	300	300	300	300
Ширина, см										
Storis (+/- 5%), mm										
Thickness (+/- 5%), mm	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Толщина (+/- 5%), мм										
Svoris (+/- 5%), g/m ²										
Weight (+/- 5%), g/m ²	169	169	169	169	169	169	169	169	169	169
Вес (+/- 5%), г/м ²										
Šviesos atsparumas										
Light fastness	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5	4 – 5
Светостойкость										
Drėgnas valymas										
Wet cleaning	•	•	•	•	•	•	•	•	•	•
Влажная чистка										
Šviesos atspindėjimas, %										
Light reflection, %	71%	71%	71%	71%	71%	71%	71%	71%	71%	71%
Отражение света, %										
Šviesos sugėrimas, %										
Light absorption, %	29%	29%	29%	29%	29%	29%	29%	29%	29%	29%
Затемнение света, %										
Šviesos perdavimas, %										
Light transmission, %	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Светопропускание, %										
Degumas										
Flame retardant	—	—	—	—	—	—	—	—	—	—
Огнестойкость										



SOLEMLUX





solemlux@solemlux.it

www.solemlux.it/en/

